

Series 100

High Performance Liquid Filter Bags

The 3M™ Series 100 High Performance Liquid Filter Bag is constructed of polypropylene melt blown microfibers, allowing for very fine particle capture at high efficiencies. All 3M Brand Series 100 Liquid Filter Bags are over 90% efficient at their suggested application rating. The 3M Filter offers an excellent balance of high efficiencies with very low initial pressure drops. The bag construction makes this filter an easy to use, convenient, high performance alternative to filter cartridges.

The 3M Series 100 Liquid Filter Bag can also adsorb unwanted trace oils that frequently occur in processed fluids. The high amount of surface area due to the polypropylene microfiber construction, results in oil holding capacities from 10-20 times the filter's own weight.

Materials of Construction

Filter Media:

Meltblown polypropylene microfiber filter media provides high particle removal efficiency for high quality filtration with broad chemical compatibility.

No silicone is intentionally used in materials of construction or in manufacturing.

The raw materials composing these filters are FDA compliant according to CFR Title 21.

Sealing Ring:

Available in "A & D" - Stainless Steel, and "B" - Polypropylene.



Applications

Prefilters or Final Filters for:

Acids and bases	Machine coolants
Amines	Makeup water
Carbon beds	Organic solvents
Completion fluids	Photo chemical
Deep wells	Plating solutions
Desalination	RO membranes
DI resins	Storm Water
Glycol	Wastewater
Groundwater clean-up	Waterflood
E-Coat	

Performance Data

Table 1: Loading Capacity

Product Model Number	123	124	125	126	128
Dirt - grams at 25 gpm (5.6 cu m/hr)	125	121	146	155	351
Mineral Oil - grams at saturation	1385	2280	2050	1640	2845

Loading: The data above shows typical loading capacities of the different micron rated filters. Loading capacity is determined by challenging a filter with a dispersion of silica test dust in water at the recommended flow rate. Pressure drop is monitored and testing is terminated at 35 psid (2.4 bar). The loading capacity reported is the dry weight gain of the bag.

Table 2: Particle Removal Efficiency (microns)

Product Model Number	123	124	125	126	128
Efficiency @ 95%	1.5	2.5	7.5	10.0	34.0
Efficiency @ 90%	1.3	1.3	6.5	8.0	29.0
Efficiency @ 75%	0.9	1.0	2.5	7.0	21.0
Efficiency @ 50%	<0.7	<1.0	<1.0	4.5	7.0

Efficiency: The Series 100 High Performance Filter Bags are rated using a silica test challenge in water at 25 gpm (5.7 cu m/hr). The results reported are typical initial efficiencies taken within ten minutes of the start of the test and are cumulative data.

Series 100 Ordering Guide

Table 3: Operating Conditions


Maximum Operating Temperature	180° F (82° C)
Recommended Flow (in water):	25 gpm (5.7 cu m/hr)
Suggested Maximum Flow (in water):	50 gpm (11 cu m/hr)
Suggested Maximum Differential Pressure	35 psid (2.4 bar)

Pressure Drop: The Series 100 High Performance Filter Bags have low initial pressure drop (Δp) in water as the chart indicates. The chart includes the pressure drop of a typical single vessel to assist you in sizing your filter system.

Disposal

Disposal of used filter bags must comply with applicable federal, state and local laws and regulations.

Graph 1: Clean pressure Drop vs. Flow Rate (PSID)

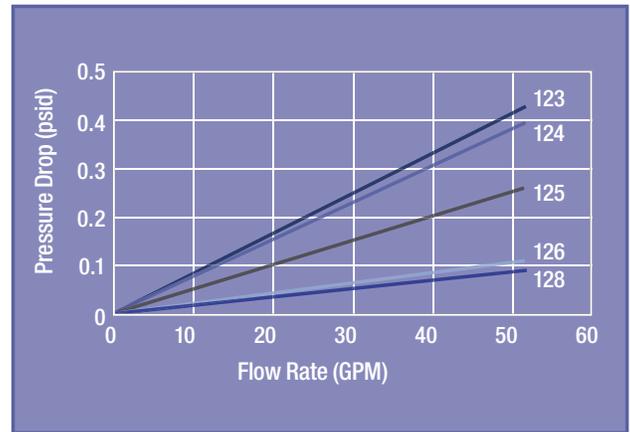

Product Specifications

Product Model Number	Sealing Ring Material	Micron Rating Initial Efficiency	Part Number	Length	Bags per Case								
113A	Stainless Steel	1.5 micron @ 95%	70-0202-3727-0	110 Series #1 Size: 16 in (41 cm)	10								
113B	Polypropylene		70-0202-2776-8										
113D	Stainless Steel		70-0202-3728-8										
114A	Stainless Steel	2.5 micron @ 95%	70-0202-3729-6			110 Series #1 Size: 16 in (41 cm)	10						
114B	Polypropylene		70-0202-2779-2										
114D	Stainless Steel		70-0202-3730-4										
115A	Stainless Steel	7.5 micron @ 95%	70-0202-3731-2					110 Series #1 Size: 16 in (41 cm)	10				
115B	Polypropylene		70-0202-2782-6										
115D	Stainless Steel		70-0202-2783-4										
116A	Stainless Steel	10 micron @ 95%	70-0202-3732-0							110 Series #1 Size: 16 in (41 cm)	10		
116B	Polypropylene		70-0202-2785-9										
116D	Stainless Steel		70-0202-3733-8										
118A	Stainless Steel	34 micron @ 95%	70-0202-3734-6	110 Series #1 Size: 16 in (41 cm)	10								
118B	Polypropylene		70-0202-2788-3										
118D	Stainless Steel		70-0202-2789-1										
123A	Stainless Steel	1.5 micron @ 95%	70-0202-2790-9			120 Series #2 Size: 32 in (81 cm)	10						
123B	Polypropylene		70-0202-3736-1										
123D	Stainless Steel		70-0202-3737-9										
124A	Stainless Steel	2.5 micron @ 95%	70-0202-3738-7					120 Series #2 Size: 32 in (81 cm)	10				
124B	Polypropylene		70-0202-3739-5										
124D	Stainless Steel		70-0202-3740-3										
125A	Stainless Steel	7.5 micron @ 95%	70-0202-3874-0							120 Series #2 Size: 32 in (81 cm)	10		
125B	Polypropylene		70-0202-3741-1										
125D	Stainless Steel		70-0202-2798-2										
126A	Stainless Steel	10 micron @ 95%	70-0202-3742-9	120 Series #2 Size: 32 in (81 cm)	10								
126B	Polypropylene		70-0202-3743-7										
126D	Stainless Steel		70-0202-2801-4										
128A	Stainless Steel	34 micron @ 95%	70-0202-3744-5									120 Series #2 Size: 32 in (81 cm)	10
128B	Polypropylene		70-0202-3745-2										
128D	Stainless Steel		70-0202-2804-8										

Sealing Ring Diameters: "A" Versions: 7.03" (17.9 cm), "B" Versions: 7.20" (18.3 cm), "C" Versions: 7.00" (17.8 cm)

Important Notice

The test results described in this literature are accurate to the best of our knowledge. A variety of factors, however, can affect the performance of this product in a particular application, some of which are uniquely within your knowledge and control. INFORMATION IS SUPPLIED UPON THE CONDITION THAT THE PERSONS RECEIVING THE SAME WILL MAKE THEIR OWN DETERMINATION AS TO ITS SUITABILITY FOR THEIR USE. IN NO EVENT WILL 3M PURIFICATION INC BE RESPONSIBLE FOR DAMAGES OF ANY NATURE WHATSOEVER RESULTING FROM THE USE OF OR RELIANCE UPON INFORMATION.

It is your responsibility to determine if additional testing or information is required and if this product is fit for a particular purpose and suitable in your specific application.

3M PURIFICATION MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS

Limitation of Liability

3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability. Some states and countries do not allow the exclusion of limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.



3M Purification Inc.

400 Research Parkway
Meriden, CT 06450
U.S.A.

(800) 243-6894
(203) 237-5541
Fax (203) 630-4530
www.3mpurification.com

3M is a trademark of 3M Company.

Please recycle. Printed in U.S.A.
© 2009 3M Company. All rights reserved.
70-0708-1287-3
REV 0110